

# DUPONT™ VESPEL®

## FOR HIGH TEMPERATURE BUSHINGS/WASHERS IN TURBINES, JET ENGINES AND AIRCRAFT APPLICATIONS

### Application

- There are a wide variety of locations on a jet engine and aircraft where parts have relative motion that benefit from wear resistant, low friction materials.
- Common applications are variable stages and actuation systems in jet engine compressors, bleed valve systems, valves, and actuators for nacelles and aircraft surfaces.

### Challenges

- Damage can occur to expensive metal components such as vanes from metal on metal engagement resulting in galling and locked components.
- Components need to withstand thermal excursions for duration of expected engine life with temperatures in excess of 600 °F/315 °C.
- Bushings need to withstand impact, cantilever loading, and accommodate designs with tight fits.
- Most jet engine applications do not have lubrication.
- Each application has a unique set of operating conditions and requirements.

### Solution


- DuPont™ VespeL® offers a wide variety of products that have demonstrated high performance on bushing and washer applications across turbines, engines, and aircraft for over 40 years (see selection guide).
- Product selection can be optimized to help provide a customized solution to your unique application conditions.

### Features and Benefits


- High temperature material capabilities in application environments in excess of 600 °F/315 °C.\*
- Longer component life for higher cost mating components.
- Potential weight savings of 40% over aluminum and 75% over stainless steel and titanium due to lower density of composite materials
- Lower friction vs. metal with dynamic coefficient of 0.2 or less.
- Fiber and metal reinforced product options for high load applications. ASB grades utilize metal retainers with low friction/wear resistant liners.
- Broad material options allow for customized solutions to help meet specific application requirements.



Figure 1. DuPont Vibratory Rig Wear; 475 °F/25 hr/55 lb

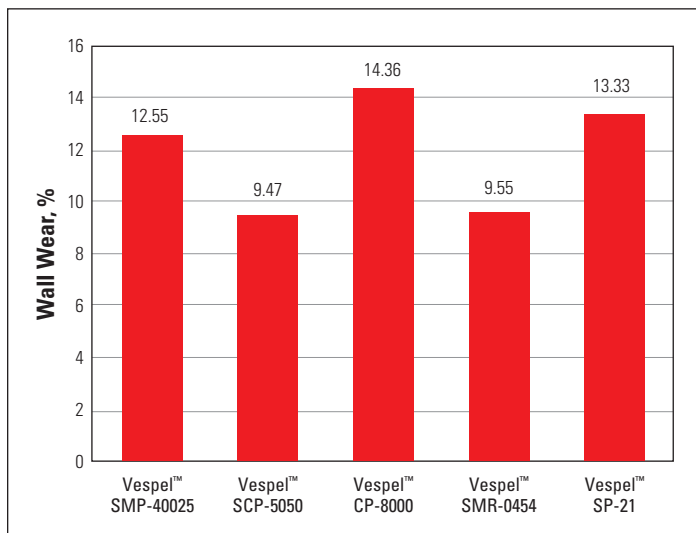

**Figure 2. Selection Guide**

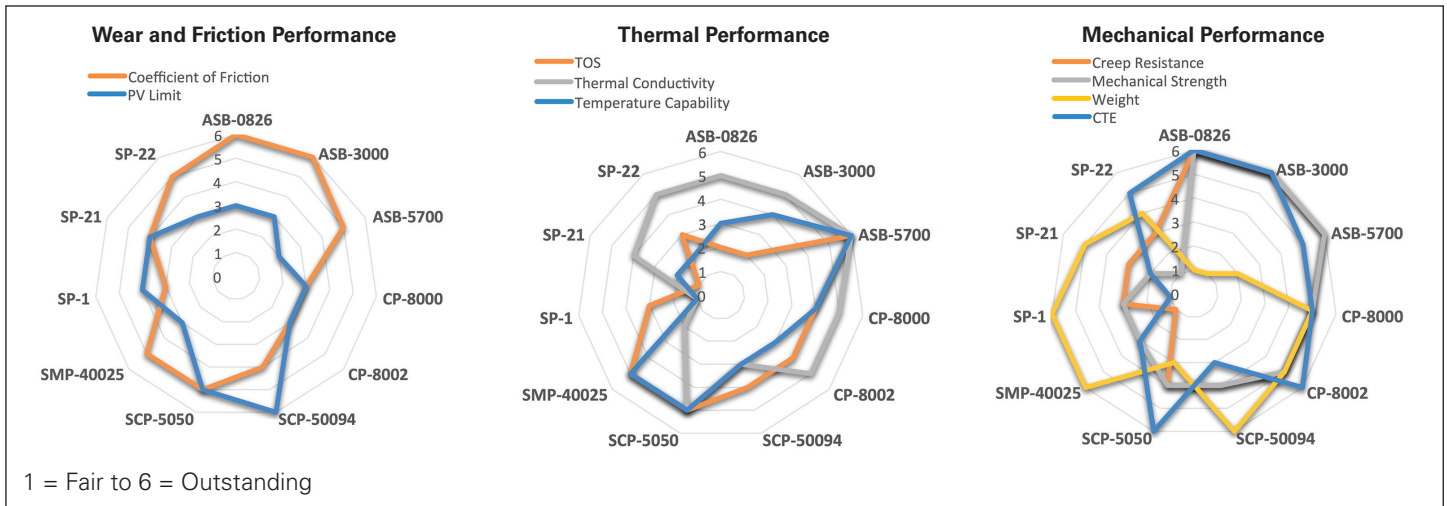

		ASB-0826	ASB-3000	ASB-5700	CP-8000	CP-8002	SCP-50094	SCP-5050	SMP-40025	SP-21	SP-22
Wear & Friction Performance	Coefficient of Friction	6	6	5	3	3	4	5	5	4	5
	PV Limit	3	3	2	3	3	6	5	3	4	3
Thermal Performance	TOS	2	2	6	4	4	4	5	5	1	3
	Thermal Conductivity	5	5	6	5	5	3	5	2	4	5
	Temperature Capability	3	4	6	4	3	3	5	5	2	2
Mechanical Performance	Creep Resistance	6	6	6	5	5	4	4	1	3	3
	Mechanical Strength	6	6	6	5	5	4	4	3	2	1
	Weight	1	1	2	5	5	6	3	6	5	4
	CTE Match	6	6	5	5	6	3	6	3	2	5

Fair = 1 ←→ 6 = Outstanding

\*Actual temperature limits are dependent on specific application conditions. For more information, please contact your DuPont representative.

Visit us at [vespel.dupont.com](http://vespel.dupont.com)

Contact DuPont at the following regional locations:

**North America**

800-222-8377

**Latin America**

+0800 17 17 15

**Europe, Middle East, Africa**

+41 22 717 51 11

**Greater China**

+86-400-8851-888

**ASEAN**

+65-6586-3688

**Japan**

+81-3-5521-8484

The information provided in this data sheet corresponds to our knowledge on the subject at the date of its publication. This information may be subject to revision as new knowledge and experience becomes available. The data provided fall within the normal range of product properties and relate only to the specific material designated; these data may not be valid for such material used in combination with any other materials, additives or pigments or in any process, unless expressly indicated otherwise.

The data provided should not be used to establish specification limits or used alone as the basis of design; they are not intended to substitute for any testing you may need to conduct to determine for yourself the suitability of a specific material for your particular purposes. Since DuPont cannot anticipate all variations in actual end-use and disposal conditions, DuPont does not guarantee favorable results, makes no warranties and assumes no liability in connection with any use of this information. All such information is given and accepted at the buyer's risk. It is intended for use by persons having technical skill, at their own discretion and risk. Nothing in this publication is to be considered as a license to operate under or a recommendation to infringe any patent. DuPont advises you to seek independent counsel for a freedom to practice opinion on the intended application or end-use of our products.

**CAUTION:** Do not use DuPont materials in medical applications involving implantation in the human body or contact with internal body fluids or tissues unless the material has been provided from DuPont under a written contract that is consistent with DuPont policy regarding medical applications and expressly acknowledges the contemplated use. For further information, please contact your DuPont representative. You may also request a copy of DuPont POLICY Regarding Medical Applications H-50103-5 and DuPont CAUTION Regarding Medical Applications H-50102-5.

Copyright © 2017 DuPont. The DuPont Oval Logo, DuPont™, and Vespel® are trademarks or registered trademarks of E.I. du Pont de Nemours and Company or its affiliates. All rights reserved.

VPE-A40049-00-A0417 (4/17)

